LogiLink®

USB 3.2 Gen 1 to HDMI Multiport Adapter & PD

Art. No.: **UA0258**

The USB-C™ to HDMI Multiport Adapter lets you connect your MacBook with a USB-C™ port to an HDMI display, while also connecting a standard USB3.0 device and a USB-C™ charging cable.

This adapter allows you to mirror your MacBook or Chromebook display to your HDMI-enabled TV or display in up to 1080p at 60Hz.
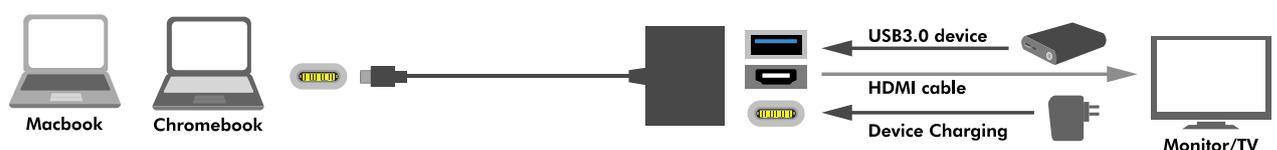
Simply connect the adapter to the USB-C™ port on your MacBook or Chromebook, and then to your TV or projector via an HDMI cable (sold separately).

Use the standard USB port to connect devices such as your flash drive or camera or a USB cable for syncing and charging your smart phones.

You can also connect a charging cable to the USB-C™ port to charge your MacBook, or Google Chromebook or other USB-C™ supported devices.

Features:
» Supports USB-C™ input, and USB and HDMI output
» Supports DisplayPort 1.2 Alt-mode
» Supports USB 3.1 Gen1 super speed (5 Gbps) transmission, downward compatible USB 2.0
» USB A port supports simultaneous charging and transmission of data for USB devices
» Supports HDMI resolution up to 1080P @60Hz
» Supports both video and audio output
» USB-C™ female port supports USB Power Delivery Profile 4 up to 60W (20V/3A)
» Supports simultaneous charging to your MacBook or Google Chromebook, or any other USB-C™ supported devices
» Easy to use and carry

Macbook   Chromebook

USB3.0 device
HDMI cable
Device Charging

Monitor/TV

UA0258

*Specifications are subject to change without prior notice.
*USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.
*All trade names referenced are the registered trademark of their respective owners.

4 052792 038712

Made in China

Best Connectivity

LogiLink®

USB 3.2 Gen 1 to HDMI Multiport Adapter & PD

Art. No.: UA0258

Specification:

Input	1x USB-C™ Male 1x USB-C™ Female for charging
Output	1x HDMI Female 1x USB A Female
HDMI Resolutions	Up to 1080P @60Hz
USB A Port	USB 3.1 Gen1 Super Speed up to 5 Gbps
USB-C™ Standard	USB 3.1 Gen1 (Thunderbolt™ 3 compatible)
Operating Temperature	0°C - 45°C
Operating Humidity	10 - 85% RH (no condensation)
Storage Temperature	-10°C - 70°C
Storage Humidity	5 - 90% RH (no condensation)
USB A female Port	Up to 5W (5V/1A)
USB-C™ Female Charging Port	USB PD Profile 4 Source up to 60W (20V/3A)
Product Dimension	59.1x40.2x14.1 mm
Product Weight	30 g
Cable Length	14 cm

Compatible Devices:

Apple	2015 MacBook 2016 MacBook 2016 MacBook Pro
Dell	XPS 13
Google	Chromebook Pixel
HP	Elite x2 1012 G1 Pro Tablet 608
Samsung	900X5L-K01

1080p Full HD | **Macbook** Support | **Chromebook** Support | Up to **60W** USB PD | **DisplayPort**

Package Contents:
» 1x USB 3.2 Gen 1 to HDMI Multiport Adapter & PD
» 1x User Manual

Package Informations:
» Packing Dimension: 202x138x25 mm
» Packing Weight: 0.09 kg
» Carton Dimension: 520x366x185 mm
» Carton Q'ty: 40 pcs
» Carton Weight: 4.4 kg

Best Connectivity

(!) Proper use of the PD function can only be guaranteed in combination with certified USB cables with E-Mark chipset.

*Specifications are subject to change without prior notice.
*USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.
*All trade names referenced are the registered trademark of their respective owners.

UA0258

4 052792 038712

Made in China

CE

EC-Declaration of Conformity

According to the regulations
2014/30/EU(EMC) & 2011/65/EU (RoHS)

We, Importer / Distributor

2direct GmbH
Langenstück 5
58579 Schalksmühle
Germany

Declare that the product

Brand Name: **LogiLink**
Model Number: UA0258
USB3.1Adapter, USB Type C to HDMI +USB adapter

Is in Conformity with the following European Standards:

EN 55032:2015
EN55024:2010+A1:2015
EN50581:2012

Report No: EA1710146E 01001

Identification of signatory empowered to bind the manufacturer or his authorized representative.

2direct GmbH
Langenstück 5
D-58579 Schalksmühle
Tel : +49 2351-66887-0
Fax: +49 2351-66887-22

Schalksmühle, 13th November 2017
Place and date of issue

Signature (Wilfried Grohnert)